Sign LEDs & Accessories

LM2-0707

10 YEARS WARRANTY

2 - 6″	160 LM/W	DC12V 0.72W	LM-79 LM-80
175°	True 7000K	+3,000 lux 5″ depth	IP68

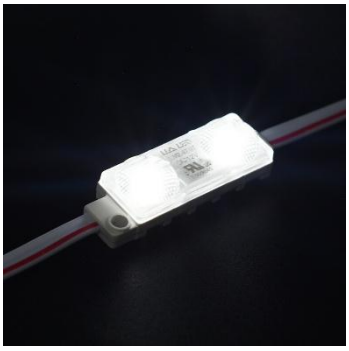

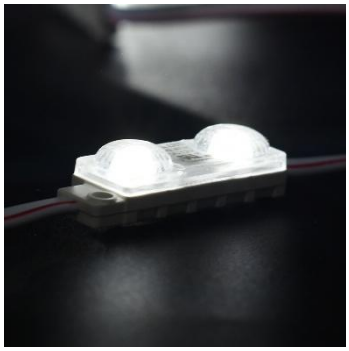

High-Lumen Output LED Modules

2″~6″ | Thin stroke of channel letters and sign boxes

115 lm per module | 160 lm/W

0.72W, DC12V

True 7000K light reproduction

RoHS

LLA LED

www.LLA-LED.com

LLALED
Sign LEDs & Accessories

LM2-0707

2 - 6″ | 160 LM/W | DC12V 0.72W | LM-79 LM-80
175° | True 7000K | +3,000 lux 5″ depth | IP68

Specifications

10 YEARS WARRANTY

Viewing Angle	175°
Input	12VDC 60mA
Driver Mode	Constant Voltage / Non-Polarity
Watts	0.72W/mod (1.2W/ft.)
Luminous Efficacy	160 lm/W
Color Temp	White 7000K
Lumens/Mod	115 lm/mod
Lumens/Foot	195 lm/ft.
Modules/Foot	1.7 mods/ft. (fully stretched)
Protection Grade	IP68
Material	Cable: UL-20AWG-300V-80°C
Fastening	Foam tape + Mechanical
Packaging	Chain: 25 mods / 15 ft. Bag: 4 chains (100 mods, 58 ft.) Case: 12 bags (1,200 mods, 702 ft.)
Warranty	7 years
Operating Temp.	-20°C ~ 45°C (-4°F ~ 113°F)
Storage Temp.	-30°C ~ 70°C (-22°F ~ 158°F)
Cascade	Max. 25 mods single-ended power feed Max. 50 mods double-ended power feed

MAX Power Supply Load			
Model	60W	120W	180W
LM2-0707	75 mods 44 ft.	150 mods 88 ft.	225 mods 132 ft.

Dimensions

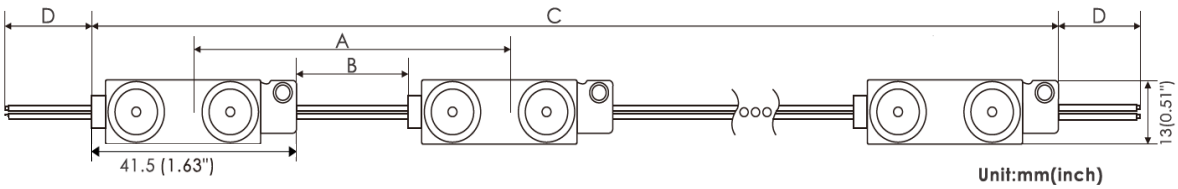

	Dimensions mm(inch)
A	172 (6.78″)
B	131.5 (5.18″)
C	8,469 (333.4″)
D	131.5 (5.18″)

Light Distribution

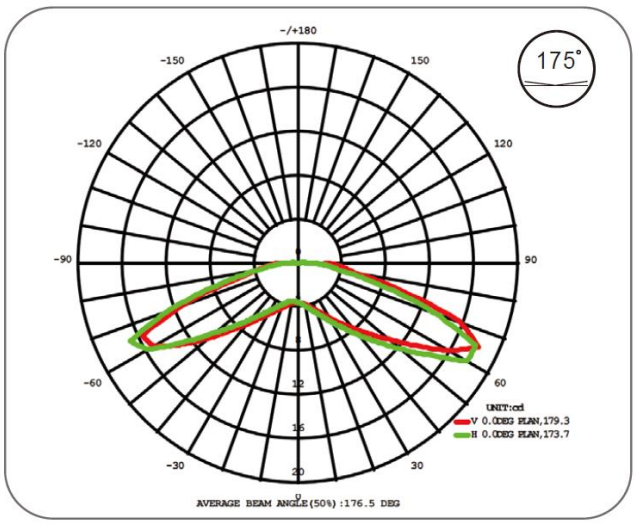

Illuminance Distribution

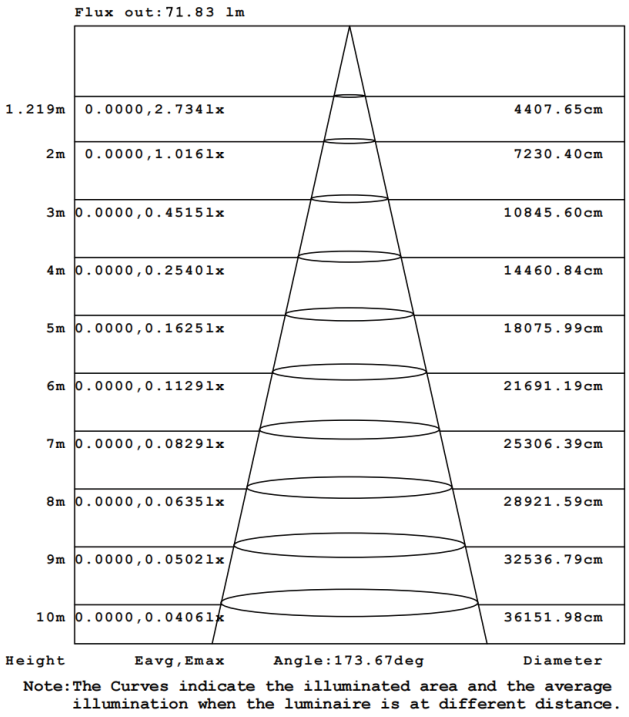

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Installation Guide

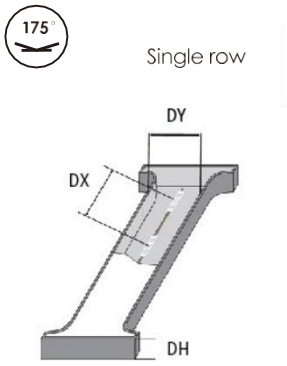

mm(inch
)

Depth (DH)	Pitch (DX)	Max. Stroke (DY)
50 (2″)	102 (4″)	125 (5″)
76.2 (3″)	152 (6″)	178 (7″)
100 (4″)	172 (6.8″)	254 (10″)
125 (5″)	172 (6.8″)	305 (12″)

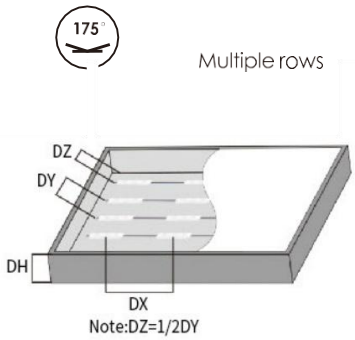

mm(inch
)

Depth (DH)	Pitch (DX)	Row Spacing (DY)
50 (2″)	102 (4″)	90 (3.54″)
76.2 (3″)	152 (6″)	152 (6″)
100 (4″)	172 (6.8″)	203 (8″)
125 (5″)	172 (6.8″)	254 (10″)

Note: Above date is tested under 5mm white acrylic. Illumination of the light box is the average illuminance value under uniform surface of the lightbox. Above data is tested under the condition of color temperature of 7000K, and the data of other color temperature will have variations.

Installation Diagram

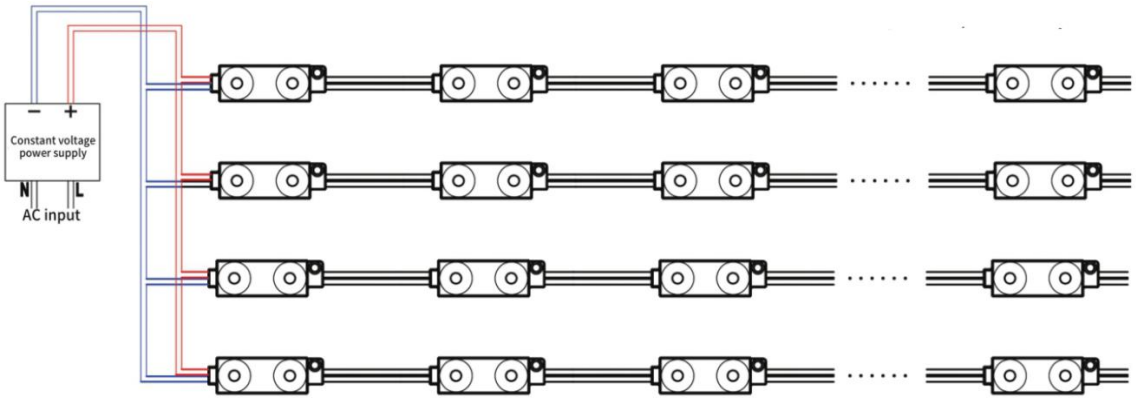

LM2-0707 = Max. 25 mods per chain @ single-end power feed
Max. 50 mods per chain @ double-end power feed

Installation Procedure

Product to be installed


LED power supply


Diagonal pliers


Wiring terminal


1. Cleaning the installation area


2. Tear the adhesive and paste it


3. Fix products and connect to power


4. Light up for test

Fastening

Foam tape + Mechanical

Warning

- Incorrect connection may cause short circuit and product failure
- Make sure power supply is unplugged during LED wires connection
- Power supply should be DC12V

Caution

- Please install in accordance with national standards and local electrical appliance specifications.
- This product must be installed and maintained by an electrician or other professional who has obtained the electrical operation certificate.
- Before installation, please check whether the product parameters are consistent with the requirements (product parameters could be found on product specification or label).
- Connect wires according to wiring diagram. Avoid short circuit during the connection.
- All connection points must be effectively insulated, waterproof and corrosion resistant.
- This series of products does not have short circuit, overload protection functions, the selected power supply must have short circuit, overload protection and other functions.
- The output voltage of the power supply must match the operating voltage of the module.
- Low-voltage products should reserve 20%-30% margin according to the actual power of the driven LED module when selecting the switching power supply.
- The wire diameter of the module connected to the power supply should be 18AWG or bigger guage, and the margin should be enlarged appropriately according to the actual current.
- The maximum number of modules used per string should not exceed the number of cascades in the above specification, otherwise brightness will be affected and there may be security risks.
- Wiring of the polarity can not be reversed, red wire is for positive, and white for negative.
- Products can not been installed in combustibles, or covered by thermal gaskets or similar materials.
- When installing or replacing a product, disconnect the power supply to ensure personal safety. Installation personnel must take ESD preventive measures, power supply must be effectively grounded.

Declaration

- The data listed in this product specification are typical values for reference only, specific parameters are subject to the actual measurement report.
- All product illustrations in this product specification are schematic drawings, details are subject to the actual received goods.
- If there are upgrade parameters, please obtain new information from your sales representative.